

LINEAR POWER SUPPLIES FA 242 / FA 121

- Operation indicator LED
- FA 121: Specially designed for supplying mast amplifiers with IF mix


REFERENCE		FA 242	FA 121
Code		052001	052002
Outputs	N°	2	1
Frequency Range	MHz	47-862	47-2150
Insertion loss	dB	<4	<1
Output voltage	Vdc	24	12 / 13-18
Maximum current output	mA	110	200
Mains voltage	Vac	230 ±10%	



FA 242 / FA 121

SWITCHED POWER SUPPLIES FA 24 S / FA 24 MINI

- Ultra-compact size
- High efficiency
- Operation indicator LED
- Discrete for domestic purpose
- FA 24 MINI fits inside electrical boxes
- FA 12 MINI: Designed for supplying mast amplifiers with IF mix

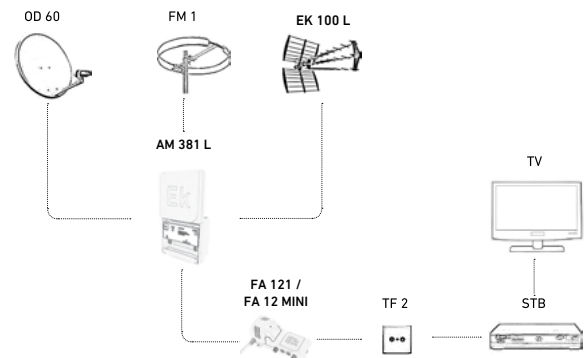

REFERENCE		FA 24 S	FA 24 MINI	FA 12 MINI
Code		052003	052006	052005
Outputs	N°	2	1	1
Frequency Range	MHz	47-862	47-1000	47 - 2150
Insertion loss	dB	<4	<2	<2
Output voltage	Vdc	24	24	12 / 13-18
Maximum current output	mA	150	150	220
Mains voltage	Vac	100/240	100/240	100/240
Dimensions	mm	86 x 65 x 23	47 x 71 x 23	47 x 71 x 23

FA 24 S



FA 24 MINI
FA 12 MINI

