


# LTE 694T filter



## Features

- CE Approved, Class A Screening effectiveness (EN-50083-2)
- Low Loss
- High Rejection
- Waterproof

Item no.	43797	
Pass band	5-694 MHz	
Insertion loss	5-600 MHz	0.5dB (typ.)
Insertion loss	600-694 MHz	<4dB (typ.)
Rejection	726-1006 MHz	>50dB (typ.)
Return loss	5-600 MHz	>12dB
Return loss	600-694 MHz	>10dB
Connectors	F-female F-male	
Housing	See photo	
Dimensions	16(Ø) x 68(L) mm	
Impedance	75 Ω	
Operating temperature	-20°C - +60°C	

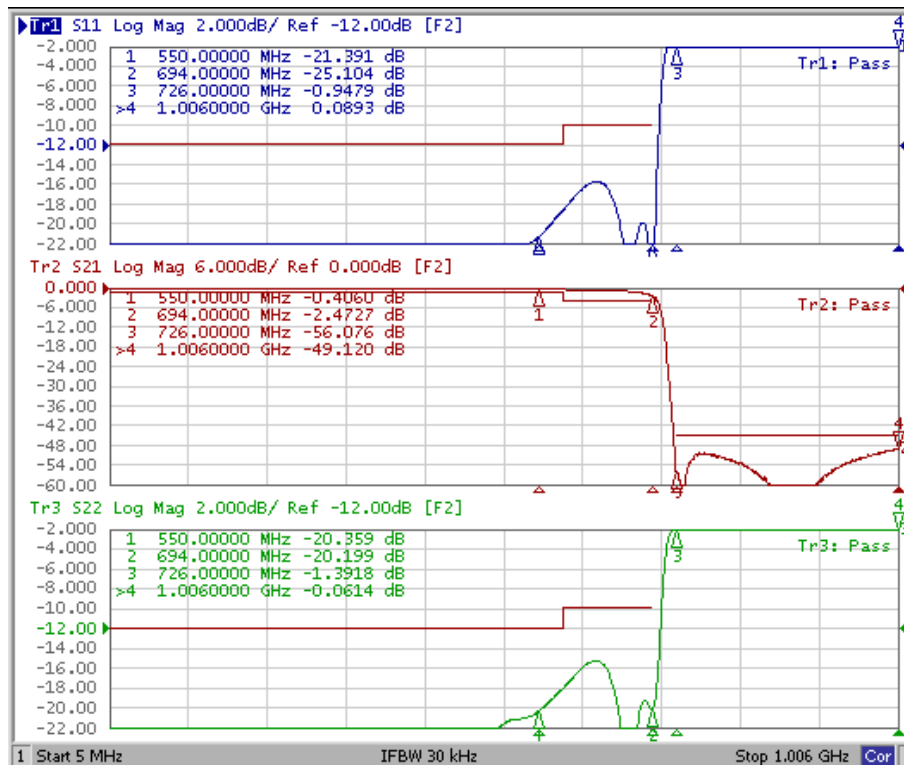

DKT COMEGA

DKT A/S  
Fanoevj 6  
DK-4060 Kirke Saaby

Tlf +45 4646 2626  
Fax +46 4646 2625  
E-mail mail@dktcomega.com  
Web www.dktcomega.com